

HERMOMETER, ENGRAVED STEM LAB THERMOMETERS

H-1951

FOR GENERAL TESTING AND LAB PROCEDURES, WHERE A.S.T.M. OR SIMILAR THERMOMETER IS NOT REQUIRED. EASY TO READ YELLOW BACK GLASS WITH PERMETCH BRAND PERMANENT PIGMENTATION OF GRADUATIONS. COMPLIES WITH NATIONAL BUREAU OF STANDARDS REQUIREMENTS FOR CERTIFICATION.

CALIBRATED FOR TOTAL IMMERSION

CENTIGRADE RANGE	GRADUATIONS	LENGTH	CODE
-35 TO +50	1 DEGREE	305mm	-1
-20 TO +110	1 DEGREE	305mm	-2
-20 TO +150	1 DEGREE	305mm	-3
-10 TO +210	1 DEGREE	381mm	-4
-20 TO +250	1 DEGREE	381mm	-5
-10 TO +310	1 DEGREE	381mm	-6
-10 TO +360	1 DEGREE	406mm	-7
-10 TO +400	1 DEGREE	406mm	-8

CALIBRATED FOR 3" IMMERSION

CENTIGRADE RANGE	GRADUATIONS	LENGTH	CODE
-35 TO +50	1 DEGREE	305mm	-9
-20 TO +110	1 DEGREE	305mm	-10
-20 TO +150	1 DEGREE	305mm	-11
-10 TO +210	1 DEGREE	381mm	-12
-20 TO +250	1 DEGREE	381mm	-13
-10 TO +310	1 DEGREE	381mm	-14
-10 TO +360	1 DEGREE	406mm	-15
-10 TO +400	1 DEGREE	406mm	-16

EXTENDED STEM FOR DEEP IMMERSION

CENTIGRADE RANGE	IMMERSION	CODE
-20 TO +150	150mm (6")	-17
-20 TO +150	225mm (9")	-18
-20 TO +150	300mm (12")	-19
-20 TO +150	450mm (18")	-20
-10 TO +250	150mm (6")	-21
-10 TO +250	225mm (9")	-22
-10 TO +250	300mm (12")	-23
-10 TO +250	450mm (18")	-24
-10 TO +360	150mm (6")	-25
-10 TO +360	225mm (9")	-26
-10 TO +360	300mm (12")	-27
-10 TO +360	450mm (18")	-28



-----THERMOMETER-----

THERMOMETER-----

THERMOMETER-----

THERMOMETER-----

H-1961 THERMOMETER, YELLOW BACK WITH 10/30 JOINT

FILLED WITH NITROGEN ABOVE MERCURY.  
GRADUATED IN 1 DEGREE SUBDIVISIONS.  
IMMERSION MEASURED FROM BOTTOM OF JOINT  
TO BOTTOM OF BULB.



IMMERSION	ACTUAL RANGE DEGREES CENTIGRADE			
	10/+110 CODE	-10/+150 CODE	-10/+250 CODE	-20/+360 CODE
25mm (1")	-1	-12	-23	-34
50mm (2")	-2	-13	-24	-35
75mm (3")	-3	-14	-25	-36
100mm (4")	-4	-15	-26	-37
125mm (5")	-5	-16	-27	-38
150mm (6")	-6	-17	-28	-39
190mm (7-1/2")	-7	-18	-29	-40
215mm (8-1/2")	-8	-19	-30	-41
250mm (10")	-9	-20	-31	-42
280mm (11")	-10	-21	-32	-43
300mm (12")	-11	-22	-33	-44

WE CARRY A COMPLETE LINE  
OF THERMOMETERS. CALL US  
FOR CATALOG LISTING THEM

ADAPTER, THERMOMETER

H-1971

TEFLON WITH FETFE O-RING. FOR USE WITH PLAIN STEM THERMOMETERS, GAS INLET TUBES, ETC. COMPRESSION SEAL ALLOWS ADJUSTABLE DEPTH POSITIONING. 10/18 SIZE FOR TUBES UP TO 6.5mm, OTHER SIZES UP TO 7mm.




JOINT SIZE	CODE
10/18	-1
14/20	-2
19/22	-3
24/25	-4
24/40	-5
29/26	-6

ADAPTER, THERMOMETER, "MINI" THREAD

H-1972

GROUND JOINT BOTTON AND THREADED NYLON BUSHING AT TOP WHICH TIGHTENS INTO #7 ACE-THRED TO FORM AN O-RING COMPRESSION SEAL WITH THERMOMETERS, BLEED TUBES, ETC. NYLON BUSHING COMPLETE WITH FETFE O-RING. 10/18 SIZE WILL ACCOMMODATE THERMOMETERS UP TO 6.5mm DIAMETER, ALL OTHERS WILL ACCOMMODATE 7mm DIAMETERS.SUITABLE FOR VACUUM WORK.

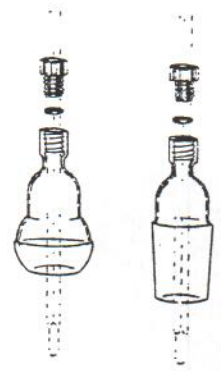

JOINT SIZE	CODE
10/18	-1
14/20	-2
19/22	-3
24/40	-4
29/42	-5
35/19	-6
35/25	-7



## H-1981 TEFLON SLEEVES

SLEEVES FIT OVER MALE JOINT TO PREVENT STICKING AND ELIMINATE THE NEED FOR GREASE. .005" THICKNESS.



<u>MEDIUMN</u>	<u>LENGTH</u>		<u>FULL</u>	<u>LENGTH</u>
<u>JOINT</u>	<u>CODE</u>		<u>JOINT</u>	<u>CODE</u>
7/15	-1		7/25	-10
10/18	-2		10/30	-11
12/18	-3		12/30	-12
14/20	-4		14/35	-13
19/22	-5		19/38	-14
24/25	-5		24/40	-15
29/26	-7		29/42	-16
34/28	-8		34/45	-17
40/35	-9		40/50	-18
			45/50	-19
			50/50	-20
			60/50	-21
			71/60	-22
			103/60	-23


## H-1982 TEFLON SLEEVES, ECONOMY

MICRO-THIN FOR USE WITH ASSEMBLIES WHICH WILL BE LEFT INTACT FOR EXTENDED PERIODS. .002" THICKNESS. PACKED 6 PER PACKAGE.



<u>JOINT</u>	<u>CODE</u>	<u>JOINT</u>	<u>CODE</u>
10/30	-1	29/42	-5
14/35	-2	34/45	-6
19/38	-3	45/50	-7
24/40	-4		

## H-1983 LAB JACK

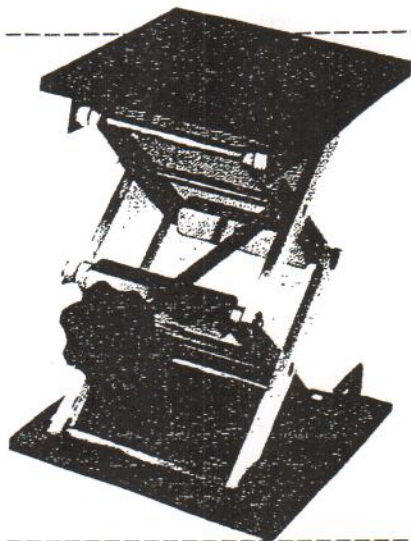

<u>PLATE</u>	<u>MAX</u>	<u>MAX</u>	
<u>L x W</u>	<u>LOAD</u>	<u>HEIGHT</u>	<u>CODE</u>
10x10cm	10kg	14cm	-1
15x15cm	30kg	29cm	-2
20x20cm	40kg	29cm	-3