


MOISTURE RECEIVERS

MOISTURE RECEIVERS

DISTILLING RECEIVERS, DEAN-STARK

H-1451

| CAPACITY ml | 24/40 CODE | 29/42 CODE |
|----------------|---------------|---------------|
| 10 | -1 | -5 |
| 20 | -2 | -6 |
| 25 | -3 | -7 |
| 50 | -4 | -8 |

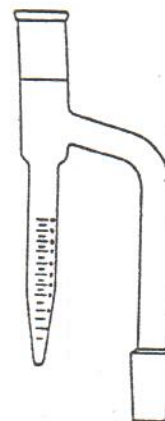


DISTILLING RECEIVERS, DEAN-STARK

H-1452

WITH RETURN ARM FOR EXCESS SOLVENT
TO RETURN TO BOILING FLASK.

| CAPACITY ml | 24/40 CODE | 29/42 CODE |
|----------------|---------------|---------------|
| 10 | -1 | -5 |
| 20 | -2 | -6 |
| 25 | -3 | -7 |
| 50 | -4 | -8 |

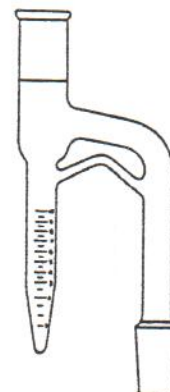



DISTILLING RECEIVERS, BARRETT TYPE

H-1453

2mm STOPCOCK

| CAPACITY ml | 24/40 | | 29/42 | |
|----------------|---------------|----------------|---------------|----------------|
| | GLASS CODE | TEFLON CODE | GLASS CODE | TEFLON CODE |
| 10 | -1 | -10 | -19 | -28 |
| 20 | -2 | -11 | -20 | -29 |
| 25 | -3 | -12 | -21 | -30 |
| 50 | -4 | -13 | -22 | -31 |
| 125 | -5 | -14 | -23 | -32 |
| 250 | -6 | -15 | -24 | -33 |
| 500 | -7 | -16 | -25 | -34 |
| 1000 | -8 | -17 | -26 | -35 |
| 2000 | -9 | -18 | -27 | -36 |

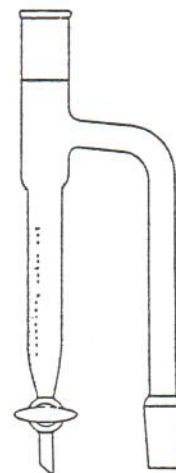


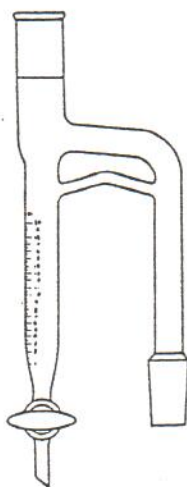

H-1461 MOISTURE TRAP, BARRETT TYPE


OVER-FLOW ARM SO THAT EXCESS SOLVENT WILL RETURN TO FLASK.

| CAPACITY ml | 24/40 | | 29/42 | |
|----------------|---------------|----------------|---------------|----------------|
| | GLASS CODE | TEFLON CODE | GLASS CODE | TEFLON CODE |
| 10 | -1 | -4 | -7 | -10 |
| 20 | -2 | -5 | -8 | -11 |
| 50 | -3 | -6 | -9 | -12 |

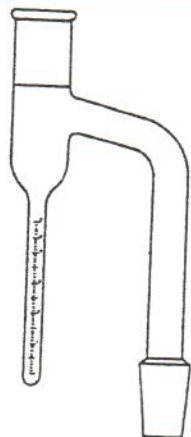

H-1462 DISTILLING RECEIVER, BIDWELL-STERLING

| CAPACITY ml | 24/40 | 29/42 |
|----------------|-------|-------|
| | CODE | CODE |
| 5 | -1 | -3 |
| 10 | -2 | -4 |

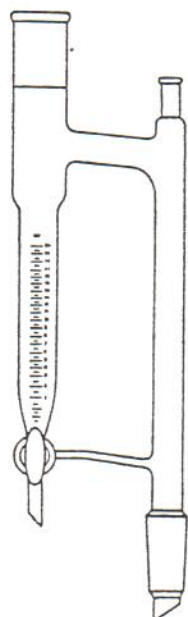

H-1463 MOISTURE TRAP, THERMOMETER JOINT
WITH 3-WAY STOPCOCK

| CAPACITY ml | 24/40 | | 29/42 | |
|----------------|---------------|----------------|---------------|----------------|
| | GLASS CODE | TEFLON CODE | GLASS CODE | TEFLON CODE |
| 10 | -1 | -10 | -19 | -28 |
| 20 | -2 | -11 | -20 | -29 |
| 25 | -3 | -12 | -21 | -30 |
| 50 | -4 | -13 | -22 | -31 |
| 125 | -5 | -14 | -23 | -32 |
| 250 | -6 | -15 | -24 | -33 |
| 500 | -7 | -16 | -25 | -34 |
| 1000 | -8 | -17 | -26 | -35 |
| 2000 | -9 | -18 | -27 | -36 |

DILATOMETER, VOLUMETRIC

H-1471


USED FOR DETERMINING CONSTANTS OF
OIL AND FATS, AS DESCRIBED IN
A.O.C.S., METHOD CD 10-57.






H-1481 MANOMETER, OPEN U-TUBE

| LENGTH mm | CODE |
|--------------|------|
| 300 | -1 |
| 600 | -2 |
| 1000 | -3 |

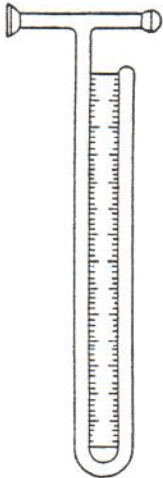

H-1482 MANOMETER, U-TUBE
WITH 12/5 BALL AND SOCKET JOINT.

H-1483 MANIFOLD, VACUUM
WITH LEFT OR RIGHT SIDE CONNECTION.

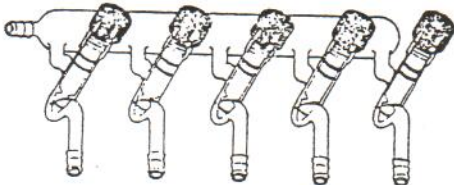

| ITEM | CODE |
|------------------|------|
| LEFT CONNECTION | -1 |
| RIGHT CONNECTION | -2 |